

Maximize Value

Net2Phone's Business Solution Delivers Savings and Value to Corporations Worldwide

The Max PVN (Private Voice Network) enables companies to add VoIP calling to existing network and phone systems. With the Max PVN, companies can make free calls within their network, plus low-cost long distance calls to any phone in the world.


By drastically reducing communication costs, improving efficiency and increasing productivity, the Max PVN delivers substantial savings and a quick return on investment.

Versatile Cost-Saving Solution


With the Max PVN, free network calling and low-cost long distance calling are now available in one solution. Free network calling is not limited to your worldwide offices, but can be expanded to include your key business contacts, such as supply chain vendors and customers.

Powerful Management Tools

The Max PVN Web interface provides network and financial administrators with a powerful, easy to use tool to manage and monitor the Max PVN system. It offers real-time access to call history data, which can be searched, sorted, exported and displayed graphically, providing insight into calling patterns and other valuable information.

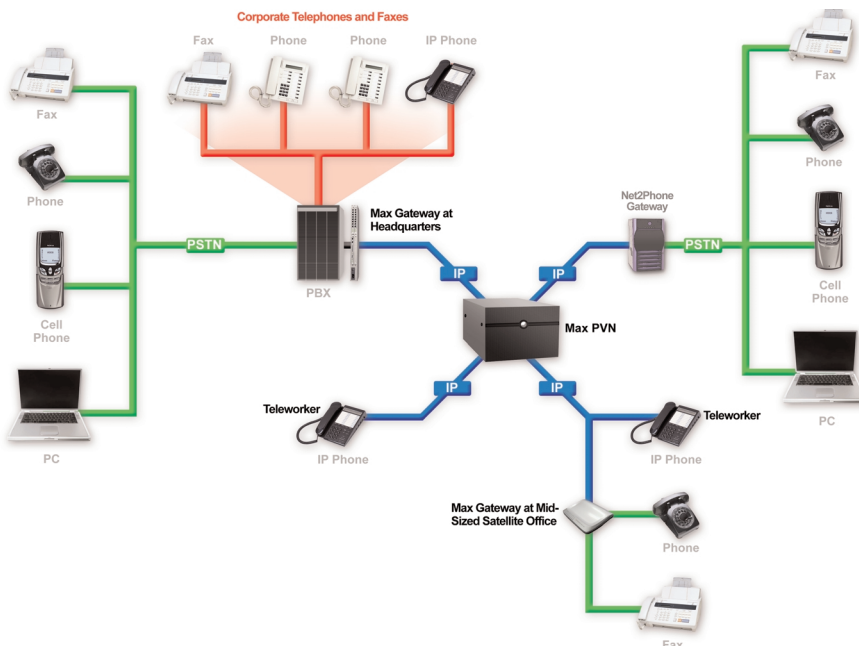

The Max PVN software is installed on a server at the headquarters location. Each location on the Max PVN network connects to the PVN server through IP phones, PCs or Net2Phone-enabled gateways that connect to your PBX system and/or accept standard analog phones.



Strong Competitive Advantages

The Max PVN is the premier enterprise calling solution, with competitive advantages including:

- Price: Total cost of ownership is a fraction of other multi-port communication products.
- Ease of implementation: The Max PVN can be integrated with your current infrastructure.
- Compatibility: You can use existing desktop phones with no requirement to purchase special IP phones.

The Max PVN is a fully scaleable solution, enabling up to 150 simultaneous calls:

Version	Maximum # of simultaneous calls	Maximum # of extensions
Max PVN10	10	100
Max PVN25	25	250
Max PVN50	50	500
Max PVN150	150	1500

Max PVN Server Requirements

- Windows 2000 or XP Professional
- 256/512 MB RAM (2000/XP)
- 10 GB Available Hard Disk Drive Space
- Ethernet (10/100 BaseT)
- Intel Pentium III 800 MHz CPU or greater
- Dedicated public and static IP address
- USB port